


EDG3113F is a recessed linear profile made of extruded aluminum housing, capped with half inch matte premium frosted lens.

This linear LED luminaire is designed to produce a uniform distribution of diffused light in drywall, tile, stone, and wooden platforms. SPK3113F is suitable for outer corners and comes in variable lengths up to 18 feet. *

Spark series are complemented with dimmable, energy-efficient, dot-free LED, producing high color rendering index lighting. The bright white LED light source with CCT options from 2200K to 6000K provides the environment with desired lighting that fits the design concept.

The lighting system can be conveniently controlled with wall remote, hand remote, and smart app options. SPK3113F is a perfect fit for use in residential and commercial spaces for damp and dry applications to produce ambient or decorative illumination.

Enolight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

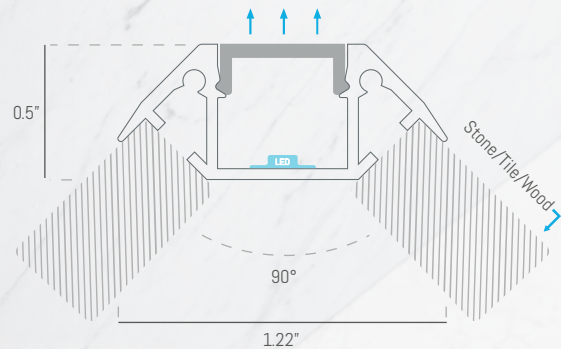

ELECTRICAL

Input

24 V - 5 W/ft - 16 W/m

Power Supply

Class 2 Dimmable 20KHZ
Lutron Hi-lume 0.1%
Lutron 3-wire 100%-1%

Operating temp

- 31°F to + 113°F
- 35°C to + 45°C

Certification

U.S./Canada UL approved
Type IC Recessed



CONTROL

Options

Combination of wireless wall touch keys, portable remotes, and mobile App

Range

Wireless controlling
transmits RF in 30m range

Multi-zone

Individual and collective zone options for color and brightness control

Dimming

Brightness, color tuning, & light mode with memory saving options

PHYSICAL

Dimension

1.22 in x 0.5 in - 31x13 mm
Up to 18 ft (5.5 m) length *
0.14 lbs/ft - 0.21 kg/m

Finish

Silver anodized aluminium, black, or white finish *

Field

Damp and dry applications

Mounting

Recessed in stone, tiles, drywall, wooden corners



LIGHT

LED type

White, tunable white, RGB
Circadian BIOS SkyBlue

CCT

3000K 3500K 4000K
4500K 5000K 5500K *

CRI

High CRI up to 97 *

Brighness

400 Lm/ft - 1400 Lm/m *

Life time

50,000 hours

Warranty

5 years warranty