


HYN2619F is a recessed surface linear profile made of extruded aluminum housing, capped with 1 inch flat frosted lens.

This linear LED luminaire is designed to produce a uniform distribution of diffused light in slat ceiling board and wood grille applications. HYN2619F has a perfect linear light construct and can be screw-mounted to ceiling board backing. This channel comes in variable lengths up to 18 feet. \*

Hyphen series are complemented with dimmable, energy-efficient, dot-free LED, producing high color rendering index lighting. The bright white LED light source with CCT options from 2200K to 6000K provides the environment with desired lighting that fits the design concept.

The lighting system can be conveniently controlled with wall remote, hand remote, and smart app options. HYN2619F is a perfect fit for use in indoor and outdoor applications to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

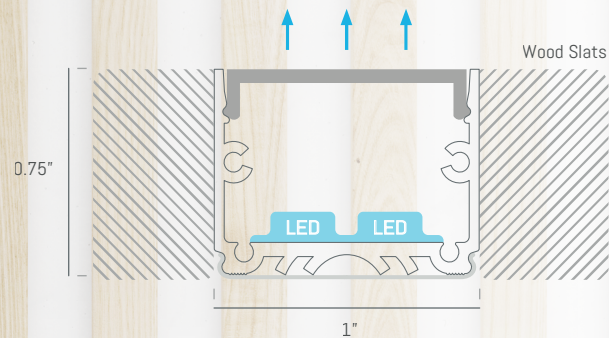

## ELECTRICAL

### Input

24 V - 10 W/ft - 32 W/m

### Power Supply

Class 2 Dimmable 20KHZ  
Lutron Hi-lume 0.1%  
Lutron 3-wire 100%-1%

### Operating temp

- 31°F to + 113°F  
- 35°C to + 45°C

## CONTROL

### Options

Combination of wireless wall touch keys, portable remotes, and mobile App

### Range

Wireless controlling transmits RF in 30m range

### Multi-zone

Individual and collective zone options for color and brightness control

### Dimming

Brightness, color tuning, & light mode with memory saving options

## PHYSICAL

### Dimension

1 in x 0.75 in - 26x19mm  
Up to 18 ft (5.5 m) length \*  
0.15 lbs/ft - 0.22 kg/m

### Finish

Mill, black, white, Silver anodized finish \*

### Field

Damp and dry applications

### Mounting

Recessed in ceiling board and wood grille platforms



## LIGHT

### LED type

Single and tunable white, Circadian BIOS SkyBlue

### CCT

3000K 3500K 4000K  
4500K 5000K 5500K \*

### CRI

High CRI up to 97 \*

### Brightness

800 Lm/ft - 2800 Lm/m \*

### Life time

50,000 hours

### Warranty

5 years warranty

